

CANOPY CAP® SELECTION AND SIZING GUIDE

Selection and Sizing Guide

Figure 1




Figure 2

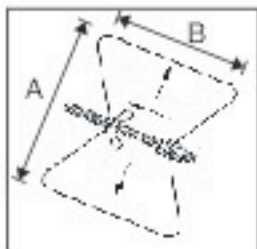


Figure 3



As shown in **Figure 1**, take accurate inside dimensions of the flue tile. Measurement "A" corresponds to the adjustable dimension of the E-Z Grip Fastener™ as shown in **Figure 2**. Measurement "B" corresponds to the fixed bracket dimension of the E-Z Grip Fastener™, also shown in **Figure 2**. The cutaway view in **Figure 3** shows how the E-Z Grip Fastener™ fits into the flue.

With these measurements in hand, select the proper Canopy Cap® model from the chart below.

CANOPY CAP® SELECTION AND SIZING GUIDE


INSIDE FLUE DIMENSIONS	TILE SHAPE	MODEL
6" x 6" (min.) 8" x 8" (max.) 9" x 9" (min.) 12" x 12" (max.)	SQUARE SQUARE	CCU-78 CCU-1212
6" x 10" (min.) 8" x 12" (max.)	RECTANGULAR	CCU-812

canopy cap™

icp

Improved Consumer Products, Inc.

(508) 695-7000 508-695-4209 (fax) www.chimneycaps.com

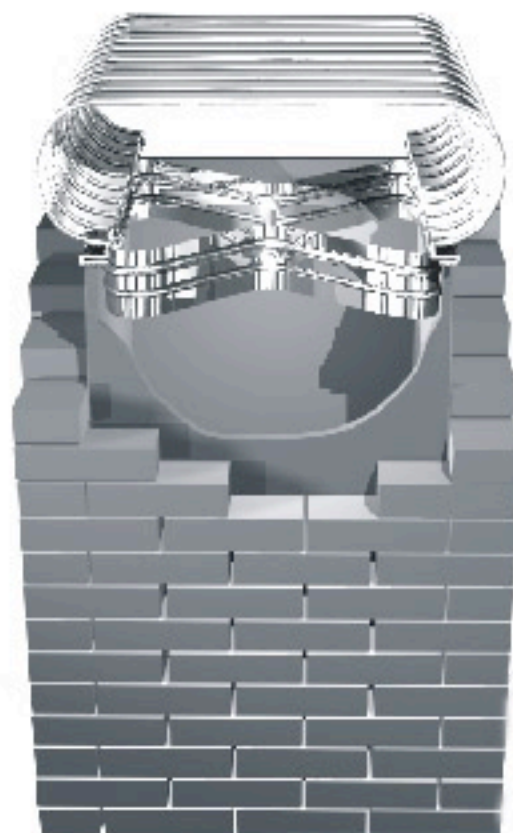

**Screen included,
but not shown here.**

The Canopy Cap® is available in three sizes. Installing the correct size is essential for proper operation. After taking accurate flue measurements, use this guide to make your selection.

Chimney tiles vary greatly from region to region and there are no "standard" tile sizes. For this reason, it is absolutely necessary to fit the inside measurements of the flue tile. This is essential to not only provide a secure fit but to adequately accommodate the volume of exhausting flue gases.

All models use the adjustable E-Z Grip Fastener™ (see **Figure 2**) to assure a secure fit on standard chimney sizes. This highly effective fastening device features an adjustable wing nut that expands the ribs of the fastener until it is secured to the flue wall with a tight friction fit.